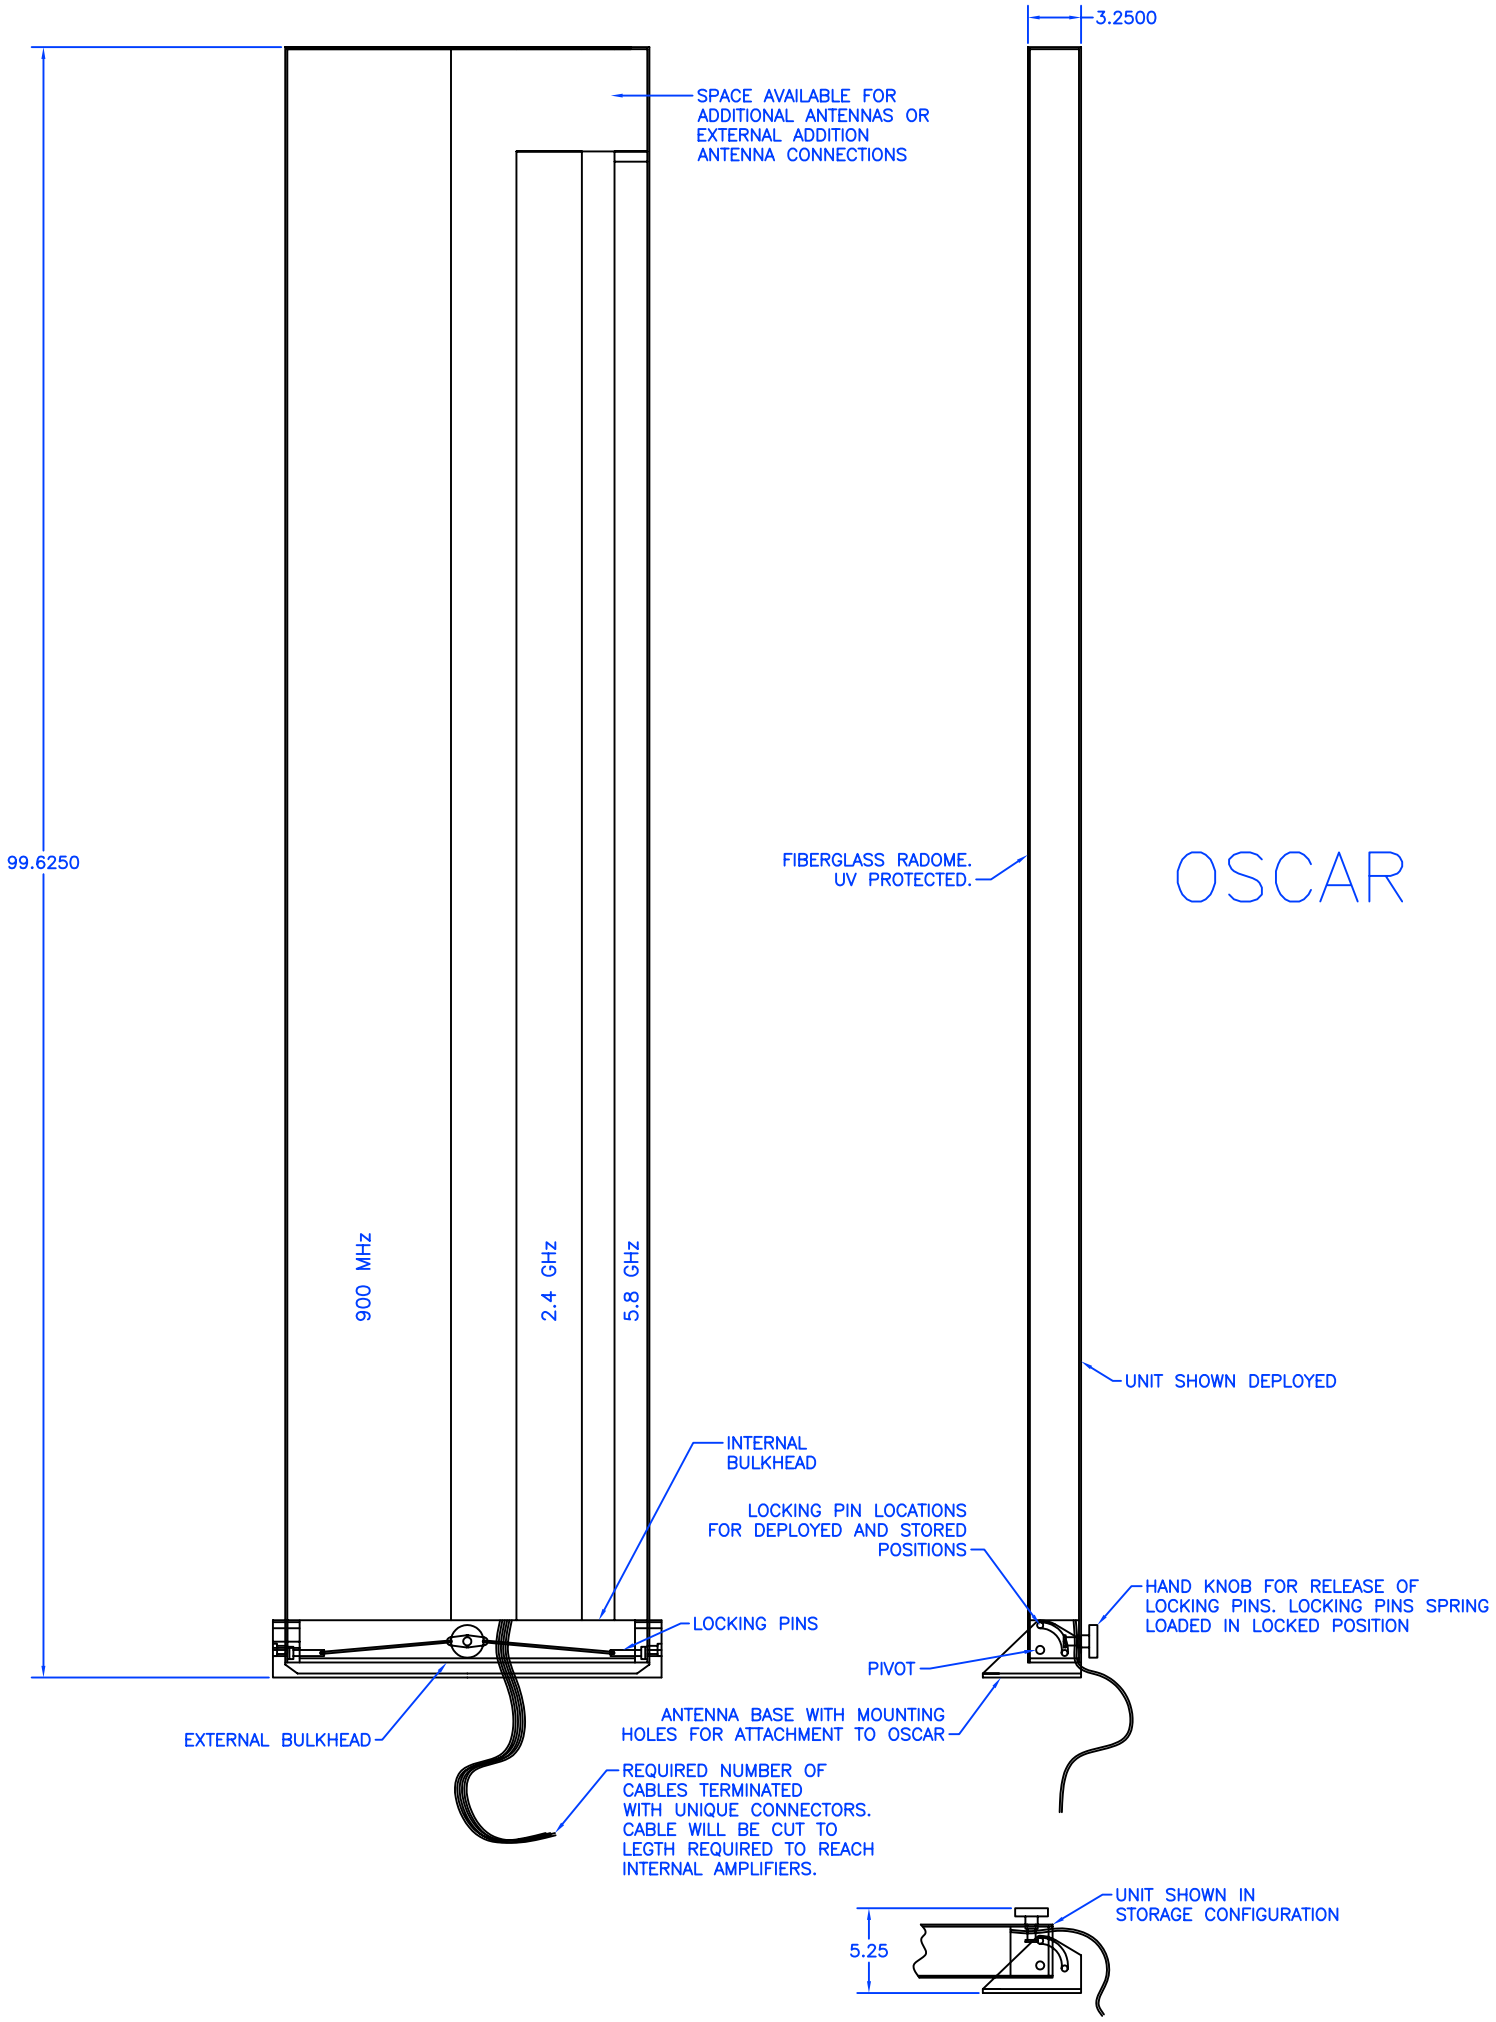
3.2500
SPACE AVAILABLE FOR ADDITIONAL ANTENNAS OR EXTERNAL ADDITION ANTENNA CONNECTIONS
99.6250
FIBERGLASS RADOME. UV PROTECTED.
OSCAR
900 MHz
2.4 GHz
5.8 GHz
UNIT SHOWN DEPLOYED
INTERNAL BULKHEAD
LOCKING PIN LOCATIONS FOR DEPLOYED AND STORED POSITIONS
HAND KNOB FOR RELEASE OF LOCKING PINS. LOCKING PINS SPRING LOADED IN LOCKED POSITION
LOCKING PINS
PIVOT
ANTENNA BASE WITH MOUNTING HOLES FOR ATTACHMENT TO OSCAR
EXTERNAL BULKHEAD
REQUIRED NUMBER OF CABLES TERMINATED WITH UNIQUE CONNECTORS. CABLE WILL BE CUT TO LEGTH REQUIRED TO REACH INTERNAL AMPLIFIERS.
UNIT SHOWN IN STORAGE CONFIGURATION
5.25